


# GENOVA



BEIGE

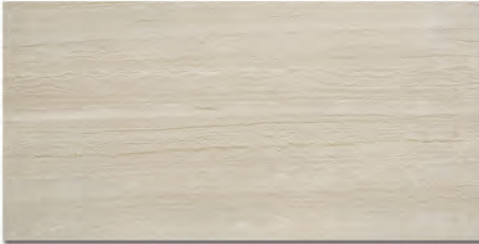

12x24

BLANCO



12x24

GALENA



12x24

GRIS



12x24

TAUPE




12x24

	VALUE	STANDARD
Abrasion resistance	PEI 4	GLAZED ISO 10545-7
Water absorption	≤% 0.2	ISO 10545-3
Breaking strength	≥50 N/mm <sup>2</sup>	ISO 10545-4
Chemical resistance	GLA / GA	ISO 10545-13
Stain resistance	A/5	ISO 10545-14
Resistance to frost	resistant	ISO 10545-12
Thermal shock resistance	resistant	ISO 10545-9
Crazing resistance	resistant	ISO 10545-11
Coefficients of friction	Fd: 0.81	ASTM C-1028 96
	Fw: 0.69	

Variations in shade and color and sometimes texture, are inherent in all tile products such as porcelain, glass and ceramic. This variation can be present from piece to piece within any production run. Prior to any installation, several loose tiles should be arranged and approved by the customer.

Tile Applications:	Residential	Light Commercial	Commercial
Usage	•	•	•
Floors	•	•	•
Walls	•	•	•
Countertops	•	•	•



2x2 Mosaic