


PETRA



CHOCOLATE

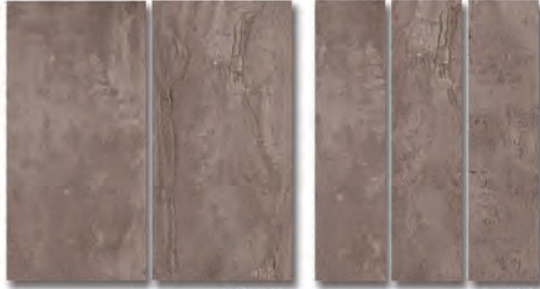

12x24

6x24

2x2 Basketweave and 3x12 Sbn also available

GREY



12x24

6x24

2x2 Basketweave and 3x12 Sbn also available

IVORY



12x24

6x24

2x2 Basketweave and 3x12 Sbn also available

TAUPE



12x24

6x24

2x2 Basketweave and 3x12 Sbn also available

VALUE STANDARD


| | VALUE | STANDARD |
|-----------------------------|---|--------------------|
| | Chocolate PEI 3 Ivory PEI 4 Taupe PEI 4 | |
| Abrasion resistance | | GLAZED ISO 10545-7 |
| Water absorption | E ≤% 0.3 | ISO 10545-3 |
| Breaking strength | ≥ 3000 N | ISO 10545-4 |
| Scratch hardness | 8 Mohs | EN 101 |
| Chemical resistance | GA | ISO 10545-13 |
| Stain resistance | A/5 | ISO 10545-14 |
| Resistance to frost | resistant- no alternation with 100 cycles | ISO 10545-12 |
| Thermal shock resistance | resistant | ISO 10545-9 |
| Crazing resistance | resistant | ISO 10545-11 |
| Color shade variation | V3 | CTDA |
| Coefficients of friction | Wet COF: 0.60-0.65 Dry COF: 0.70-0.75 | ASTM C 1028 96 |

Variations in shade and color and sometimes texture, are inherent in all tile products such as porcelain, glass and ceramic. This variation can be present from piece to piece within any production run. Prior to any installation, several loose tiles should be arranged and approved by the customer.

| Tile Applications: | | | |
|--------------------|-------------|------------------|------------|
| Usage | Residential | Light Commercial | Commercial |
| Floors | • | • | • |
| Walls | • | • | • |
| Countertops | • | • | • |



3x12 Floor Bullnose



2x2 Basketweave
set on 13x13 mesh sheet